


Haitai TaiJi 182

HTM390~410MH5-54

Monofacial high efficiency mono PV module

20.97%

Module Efficiency 20.97%

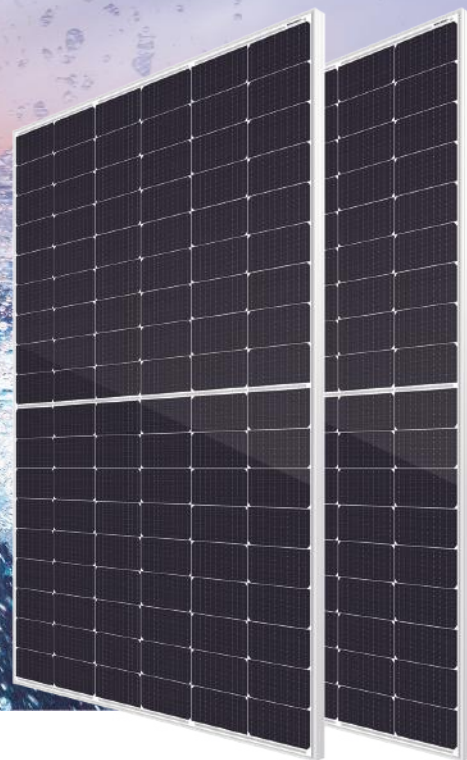

PRODUCT FEATURES



High efficiency

The multi-busbar half-cut technology can boost energy density to deliver higher output.



Highly reliable

Certified in TUV salt spray, ammonia corrosion, 2400Pa wind load and 5400Pa snow load testing. Highly reliable.



High yield

Effectively reducing BOS costs to achieve lower LCOE and enhanced project profitability.



Low degradation

First-year degradation is less than 2.0%, with linear degradation of 0.55% per year for 25 years.



Low hot-spot risk


The next-generation cell technology and optimized circuit design adopted can support improved temperature coefficient and better hotspot resistance.



Low micro crack risk

The multi-busbar technology contributes to more effective prevention of Micro crack and broken busbars.

LINEAR PERFORMANCE WARRANTY

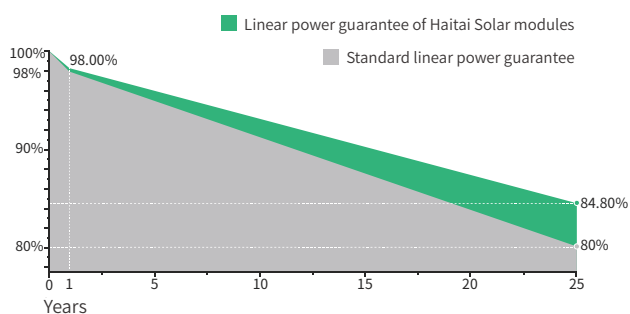

12 YEARS product warranty



25 YEARS linear power warranty



0.55% Linear attenuation of 0.55% per year within 25 years

CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: 2005 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems



电性能参数 (STC)

Maximum Power (Pmax/W)	390	395	400	405	410
Open Circuit Voltage (Voc/V)	36.66	36.81	36.96	37.11	37.26
Short Circuit Current (Isc/A)	13.40	13.50	13.60	13.70	13.79
Voltage at Maximum Power (Vmp/V)	30.7	30.85	31.00	31.15	31.30
Current at Maximum Power (Imp/A)	12.71	12.81	12.91	13.01	13.10
Module Efficiency (%)	19.95	20.20	20.46	20.72	20.97
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

电性能参数 (NMOT)

Maximum Power (Pmax/W)	292	296	300	304	308
Open Circuit Voltage (Voc/V)	33.67	33.82	33.97	34.12	34.27
Short Circuit Current (Isc/A)	10.93	11.01	11.1	11.18	11.27
Voltage at Maximum Power (Vmp/V)	27.89	28.04	28.19	28.34	28.49
Current at Maximum Power (Imp/A)	10.48	10.56	10.65	10.73	10.82

NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

结构参数

Cell Type	182×91mm Mono
Cell Orientation	108(6×18)
Module Dimensions	1724×1134×35mm
Weight	22.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 250 mm negative pole: 300 mm wire length can be customized
Connector	MC4 compatible connector




温度特征

Temperature Coefficient (Pm)	-0.350%/°C
Temperature Coefficient (Voc)	-0.270%/°C
Temperature Coefficient (Isc)	0.048%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C

包装方式


Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	806pcs	31pcs+31pcs

组件尺寸 (mm)



曲线图

Current-Voltage Curve(410W)

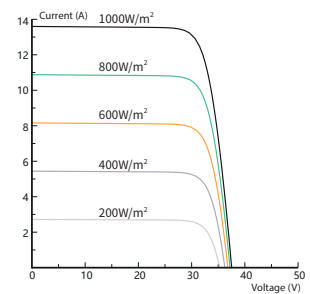

Power-Voltage Curve(410W)

